AlphaStation XP900 6/466 Systems

Order number	OpenVMS	WorkStation systems, 64bits 466MHz
#1 SN-PB10A-AB	128MB	(Disk) RX,CD,2xNI,(Graphics)
SN-PB10A-AC	256MB	
SN-PB10A-AD	512MB	

#2 Select a system disk, SCSI adapter and cable kit.

#3 Select Graphics: SN-PBXGB-AA Graphics 3D30 2D/3D

#4 SVGA color monitor   **#5** For 240V, select 2x power cords and one keyboard.

| 17" SN-VRQP7-24/23 |
| 21" SN-VRQP1-24/23 |
| North/South |
| BN39C-02 2m ext.cable |

LK461–	-AE GB	-AG G	-AM S
OVMS	-AB B	-AH NL	-AN N
	-AD DK	-AI I	-AP F
	-AF FI	-AK CH	-AS E

BN19C-2E Europe
BN19A-2E GB
BN19E-2E CH
BN19K-2E DK
BN19M-2E I

Internal options

Memory expansion

SN-MS310-AA	64MB	Max memory
SN-MS310-BA	128MB	
SN-MS310-CA	256MB	2x 512MB = 1GB
SN-MS310-DA	512MB	

Adapters

SN-PBXGB-AA	Powerstorm 3D30 2D/3D
SN-PBXGK-BB	ELSA Gloria Synergy 8MB
DE500-BA	Fast Ethernet 10/100
DEFPA-AB	FDDI adapter,SAS MMF
KZPBA-CB	UltraSCSI Diff, 68HD

Internal storage

Tape storage

TLZ10-LB	12/24GB DAT SCSI tape
KZPBA-CA	UltraSCSI SE adapter

Disk storage

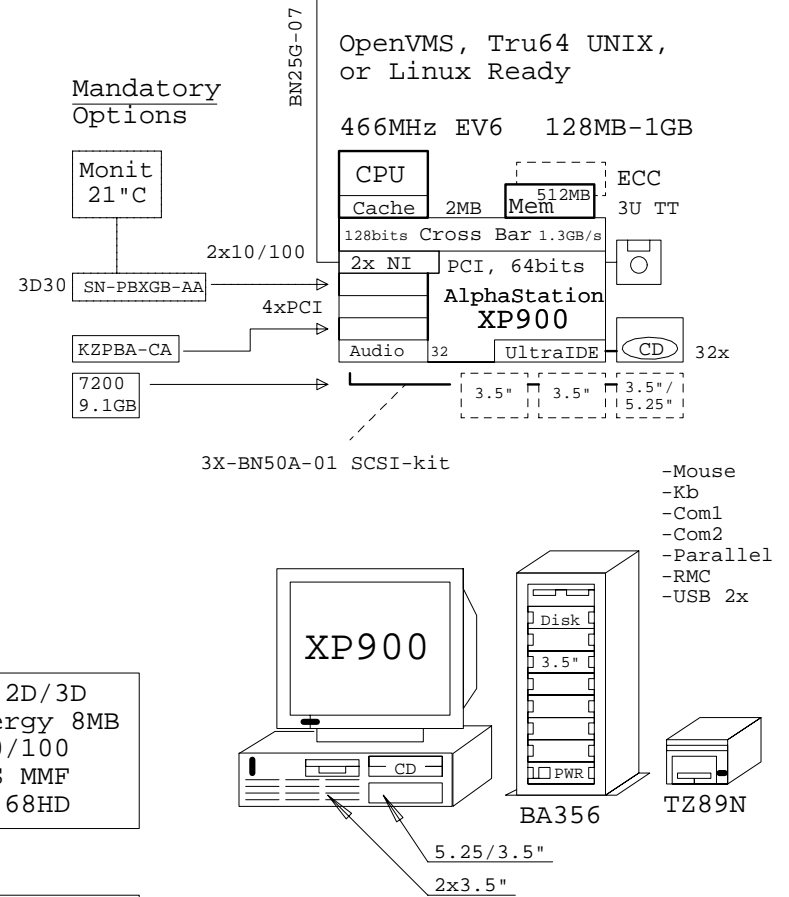| 3X-BN50A-01	SCSI Cable kit
SN-PBXRW-SC	9.1GB USCSI disk 7200
SN-PBXRW-VA	9.1GB USCSI disk 10000
SN-PBXRW-TB	18 GB USCSI disk 7200
KZPAC-CB	RAID 3-port, 8MB cache
KZPSC-UB	Cache battery

External options

Tape storage

DS-TZ89N-TA	35/70GB DLT tape,TT
BN21K-02	SCSI cable, FWD
BN19C-2E	Power cord, Europe
KZPBA-CA	UltraSCSI SE adapter

Disk storage

DS-BA356-KF	Pedestal, single bus
DS-BA356-KG	Pedestal, split bus
BN37A-02	2m SCSI,VHDCI-VHDCI
BN19C-2E	Power cord, Europe
KZPAC-AA	RAID 1-port, 4MBcache
DS-RZ1CF-VW	4.3GB UltraSCSI disk
DS-RZ1DF-VW	9.1GB UltraSCSI disk

BN25G-07

OpenVMS, Tru64 UNIX, or Linux Ready

466MHz EV6 128MB-1GB

Mandatory Options

Monit 21"C

CPU
Cache 2MB Mem 512MB ECC 3U TT
128bits Cross Bar 1.3GB/s
2x NI PCI, 64bits
AlphaStation XP900
Audio 32 UltraIDE CD 32x

3D30 SN-PBXGB-AA   2x10/100
4xPCI
KZPBA-CA
7200 9.1GB

3.5" 3.5" 3.5"/5.25"

3X-BN50A-01 SCSI-kit

-Mouse
-Kb
-Com1
-Com2
-Parallel
-RMC
-USB 2x

XP900

Disk
3.5"
PWR
BA356

TZ89N

5.25/3.5"
2x3.5"

Licenses included:

- OpenVMS V7.1-2, Base license and DIGITAL Enterprise Integration Package.

	@466MHz
SPECint95	24
SPECfp95	45

Software Processor Code: E

This configuration is generated with fresh GOLDEN EGGS Software

XP900