















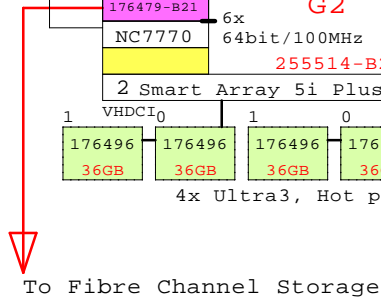


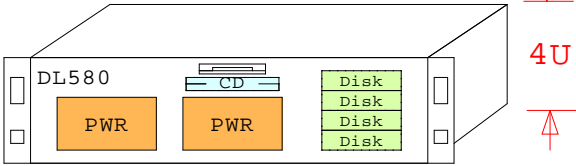
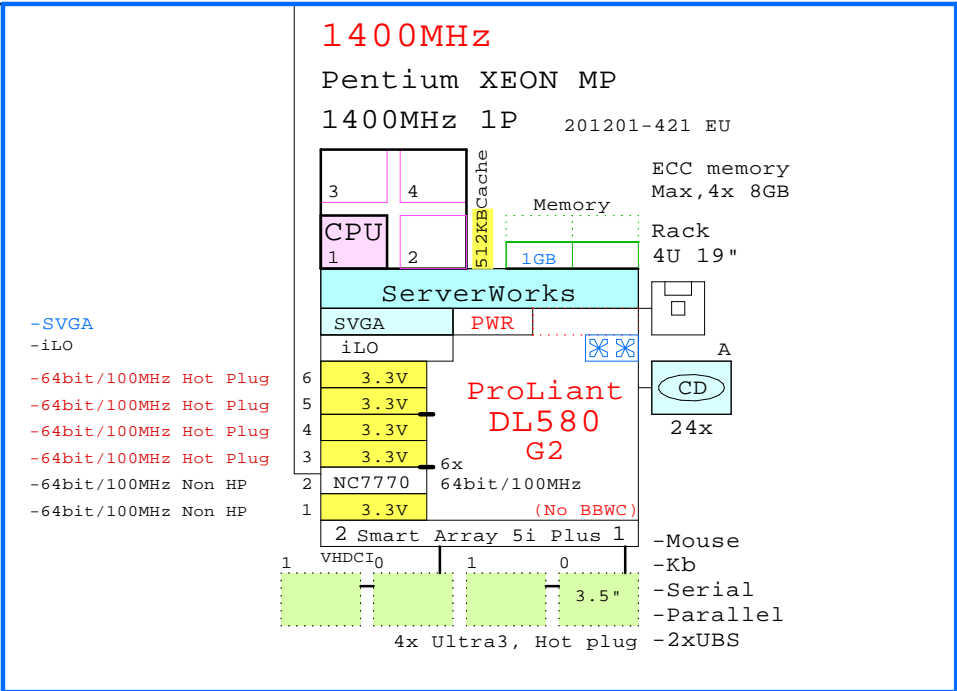
Internal Options:

-  226775-B21
2nd, 3rd, 4th CPU
-  202170-B21
-  202171-B21
-  202172-B21
-  203320-B21
Memory Expansion board
-  278535-B21
2nd power
-  255514-B21 5i BBWC
BB for WC
-  142673 142673-B22
10k
-  188122 188122-B22
15k
-  176496 176496-B22
10k
-  232432 232432-B22
10k
-  244948-B21
NC7770
64bit/66MHz
-  158575-B21
NC7131 Gigabit
64-bit/66MHz
-  138603-B21
NC3134 Ethernet, Dual
64-bit/66MHz
-  158939-B21
Smart Array 5304/128
64-Bit/66MHz
-  176479-B21
FibreChannel adapter
64-bit/33MHz



BOM of the 1400MHz system above

Part Number	Qty	Description
201201-421	1	ProLiant DL580 G2 1P 1400MHz 1GB 4U rack
1.1	1	Host Buss Cntrl KGPSA-CB,NT only
1.2	4	36GB 10000r Ultra3 SCSI disk 1"
1.3	1	1GB PC1600 Reg. ECC SDRAM (4x256MB)
1.4	1	Hot Plug Memory Expansion Board
1.4.1	1	1GB PC1600 Reg. ECC SDRAM (4x256MB)
1.5	2	Pentium III Xeon 1400-512KB processor ki
1.6	1	Battery Backed Write Cache Enable kit
1.7	1	DL580 G2 second power supply



DL580 G2

www.Compaq.com/golden-eggs

Since:May-2002

COMPAQ	06-May-2002	GEIDL580b
	Matti.Patari@compaq.com	

ProLiant DL580 G2 1400MHz
GOLDEN EGGS Visuals, Helsinki

DL580 4P