

START VAX 4000 Model 108 Advantage Servers


- OpenVMS**
 DV-418CC-E9 4000 M108 Pedestal 64MB ECC 2GB CD NAS200
 DV-418CC-F9 4000 M108 Pedestal 128MB ECC 2GB CD NAS200
- #1**
 DV-41RCC-E9 4000 M108 Rackmount 64MB ECC 2GB CD NAS200
 DV-41RCC-F9 4000 M108 Rackmount 128MB ECC 2GB CD NAS200
- For 240V use, Select Power Cord

- #2** 1x **BN19C-2E** EUROPE BN19A-2E (GB) BN19K-2E (DK)
 BN24T-2E (CH) BN18L-2E (TL)

- Console Terminal with Keyboard
- #3** **LK411** -AA US/UK -AH (NL) -AN (N) **VT520** -AA US
 -AB (B) -AI (I) -AP (F) -AD (DK) -AE (GB)
 -AD (DK) -AK (CHF) -AS (E) -AK (CHF) -AT (TL)
 KB -AF (FI) -AL (CH) G -AT (TL) -AX EUROPE
 -AG (D) -AM (S) -AV (P)

Internal Options:

Memory Expansion



Internal Storage


RZ26N-EB 1GB	TLZ09-LK 8GB DAT-tape
RZ28M-EB 2.1GB	
RZ28D-EB 2.1GB 7200	
RZ29B-EB 4.3GB 7200	

Internal Controllers




2nd DSSI	DHW42-CB 8x RS232
KFDDA-BB	DHW42-BB 16x DEC423
BC29R-06	DSW43-AA 2x Synch

External Options:

TZ88N-TA	40GB DLT-tape
BN23G-01	SCSI cable
BN19C-2E	Pwr cable

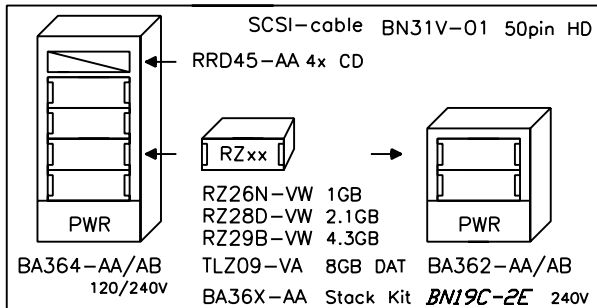

DV-418CC-F9

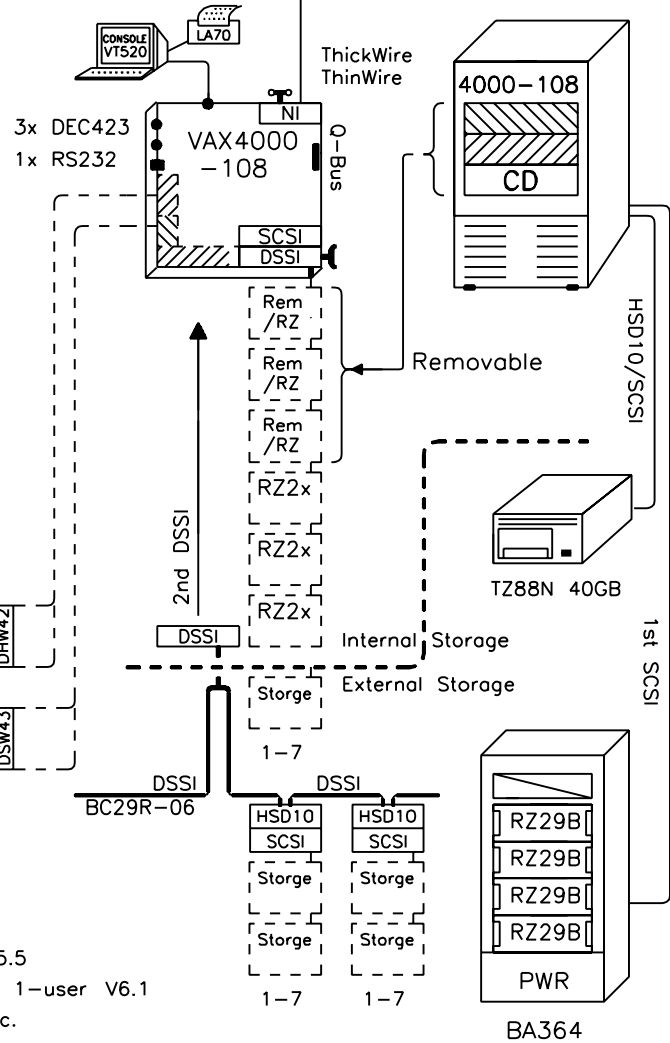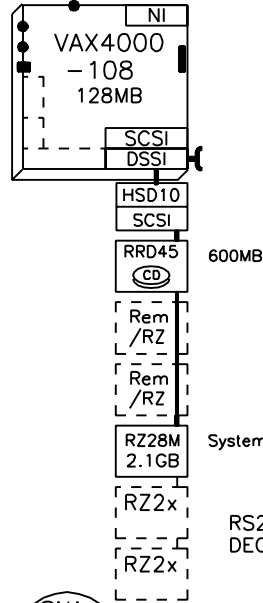

Advantage-Server System includes
 OpenVMS Base license and NAS200

- QL-XULA9-BB OpenVMS VAX 1-user V5.5
- QL-09SA9-BB OpenVMS VAX Distributed 1-user V6.1
- QA-09SAA-H8 OpenVMS CD + base doc.
- QA-VWJ8A-A8 OpenVMS and layered product binaries on CD
- QA-MC1AA-H8 NAS200 CD and Doc

NAS200:
 DECnet, TCP/IP, PATHWORKS,
 Polycenter Software Distribution Client,
 DECwindows Motif, ObjectBroker,
 DECmessageQ, and DECprint

ClusterWide License Rating 100 (E)
 Software Processor Code S

digital 20-Feb-1997 Detail Layer
 GEV418

40VUPs
 215tpsA
4108

OpenVMS V5.5-2H4 or V6.1

VAX 4000 Model 108 Systems
 GOLDEN EGGS Visual Configurations, Helsinki