



EK-DLTDM-QS. A01

---

# DIGITAL MultiSwitch 900-4 Management Agent Module Quick Start September 1998

---

This guide explains how to quickly replace the Management Agent Module and the flash memory card in the DIGITAL MultiSwitch 900-4. You need the following items to install this product:


- 
- DIGITAL MultiSwitch 900-4
  - Management Agent Module
  - Flash memory card
  - A grounded antistatic wrist strap and grounded work surface
- 

For detailed instructions and important safety information, see the *DIGITAL MultiSwitch 900-4 Installation and Configuration* manual.

---

## Remove the Management Agent Module

Step	Action
1	Use <i>clearVISN</i> Recovery Manager to back up your current configuration.
2	Loosen the two thumbscrews on the Management Agent Module which is located at the bottom of the front panel of the DIGITAL MultiSwitch 900-4.
3	Place your hands on each thumbscrew, and pull the Management Agent Module out straight.

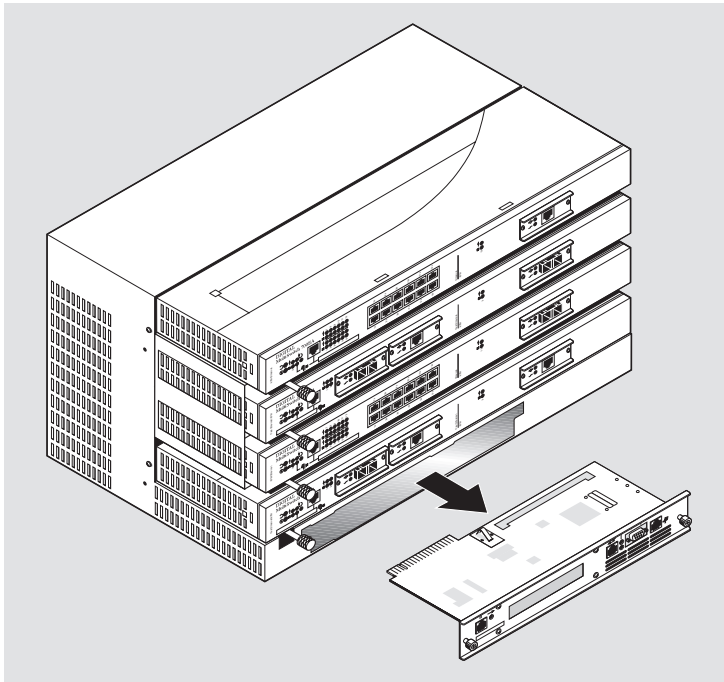

NPB-1036-97F

---

### CAUTION

Static electricity can damage modules and electronic components. DIGITAL recommends using a grounded antistatic wrist strap and a grounded work surface when handling any modules.

---


## Change the Flash Memory Card

Because the flash memory card contains all your system configuration information, you need to change the flash memory card from the old Management Agent Module to the new Management Agent Module.

---

Step	Action
1	Locate the flash memory card (1) on the Management Agent Module. When you pull the Management Agent Module from the DIGITAL MultiSwitch 900-4, the flash socket is located on the underside.
2	Remove the flash memory card from the Management Agent Module module. Slip your thumbnail (or a nonscraping instrument) under the flash memory card at the flash socket's lock lever (2) and lift the card up and out from this side.
3	Insert the new flash memory card into the Management Agent Module. Carefully push in the pin side of the card, then snap in the opposite edge.

---

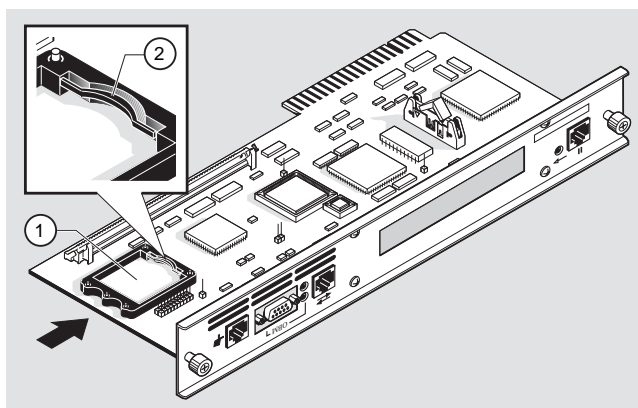


---

## Install the Management Agent Module

---

Step	Action
1	Locate the card guide inside the DIGITAL MultiSwitch 900-4 chassis.
2	Turn the Management Agent Module upside-down (with the components on the underside).
3	Grasp the new Management Agent Module by the thumbscrews and align it with the card guide.
4	Push the Management Agent Module in until it snaps in place.
5	Tighten both thumbscrews.
6	Use <i>clearVISN</i> Recovery Manager to reset the DIGITAL MultiSwitch 900-4 configuration.

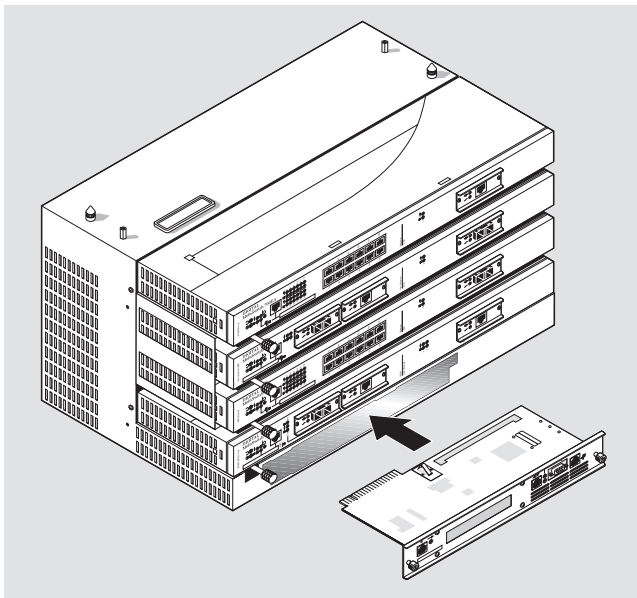

NPB-0934-97F

---

## Correspondence

### Documentation Comments

If you have comments or suggestions about this document, send them to  
**TechWriting@cabletron.com**

### Online Services

To locate product-specific information, refer to the Digital Equipment Corporation Network Products Business Home Page on the World Wide Web at the following addresses:

Americas: <http://www.networks.digital.com>  
or  
<http://www.cabletron.com>

Europe: <http://www.networks.europe.digital.com>

Asia Pacific: <http://www.networks.digital.com.au>

© Copyright 1998 by Cabletron Systems, Inc., P.O. Box 5005, Rochester, NH 03866-5005  
All Rights Reserved. Printed in the United States of America  
*clearVISN*, and the *clearVISN* logo are trademarks of Cabletron Systems, Inc.  
DIGITAL and the DIGITAL logo are trademarks of Compaq Computer Corporation.